


ON DWG

THIS DRAWING IS PROPRIETARY TO DSS  
NO PART OF THIS DRAWING MAY BE REPRODUCED  
WITHOUT THE PERMISSION OF DSS  
이 기밀인 표시를 수 보호

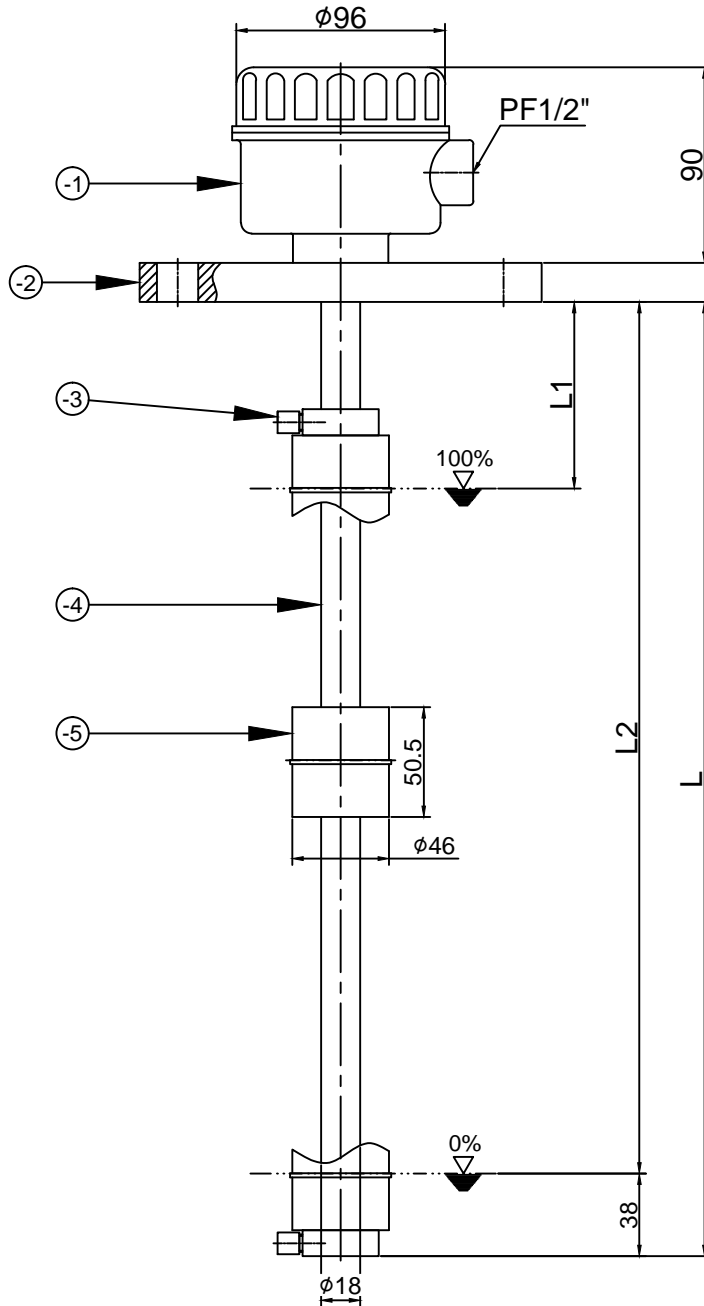

(UNIT:mm)

L	L1	L2	-	-
-5	FLLOAT	1	P.P	
-4	PIPE	1	SUS304+P.V.C	
-3	STOPPER	2	P.V.C	
-2	FLANGE	1	P.V.C	
-1	HEAD	1	A.B.S	
1	DT-200V	1SET	-	
ITEM NO.	PART NAME	QTY	MATERIAL	
SPECIFICATION				
MODEL NAME		DT-200V		
PRESSURE		MAX.2Kg/cm <sup>2</sup>		
TEMPERATURE		MAX. -10 ~ +50°C		
APPLICATIONS		WATER, OIL, MEDICAL LIQUID		
OUTPUT SIGNAL		4~20mA		
INPUT SINGAL		DC24V		
MOUNTING METHOD		TOP		
MOUNTING SIZE		ORDER MADE		
MATERIAL		P.V.C		
REMARKS :				
ORDER MADE(L1, L2, L=L2+38)				

배부처

NO	DATE	REVISION	APPD BY	BY	K.B.	HAN	INITIAL RELEASE	2014.01.27	TOLERANCES-UNLESS OTHERWISE SPECIFIED				DONG SUNG SENSORS CO.,LTD TEL:(02)2025-8988-9 FAX:(02)2025-8987		UNIT	MM, #CH	APPAR.	-	
1	4	±0.1	±0.2	±0.3	±0.5	±0.7	±0.9	±1.3	±1.8	±2.5	±3.3	±4.0	±5.0	±6.3	±8.0	±10	±12.5	±16	±20
2	16	±0.2	±0.3	±0.4	±0.5	±0.7	±0.9	±1.3	±1.8	±2.5	±3.3	±4.0	±5.0	±6.3	±8.0	±10	±12.5	±16	±20
3	63	±0.3	±0.4	±0.5	±0.7	±0.9	±1.3	±1.8	±2.5	±3.3	±4.0	±5.0	±6.3	±8.0	±10	±12.5	±16	±20	±25
4	250	±0.4	±0.5	±0.7	±1.0	±1.5	±2.0	±2.5	±3.3	±4.0	±5.0	±6.3	±8.0	±10	±12.5	±16	±20	±25	±30
5	500	±0.6	±0.8	±1.0	±1.5	±2.0	±2.5	±3.3	±4.0	±5.0	±6.3	±8.0	±10	±12.5	±16	±20	±25	±30	±35
6	1000	±0.8	±1.0	±1.5	±2.0	±2.5	±3.3	±4.0	±5.0	±6.3	±8.0	±10	±12.5	±16	±20	±25	±30	±35	±40
7	2000	±1.2	±1.5	±2.0	±2.5	±3.3	±4.0	±5.0	±6.3	±8.0	±10	±12.5	±16	±20	±25	±30	±35	±40	±45
8	10000	±1.5	±2.0	±2.5	±3.3	±4.0	±5.0	±6.3	±8.0	±10	±12.5	±16	±20	±25	±30	±35	±40	±45	±50
9	ANGLE	±.25°	±.5°	±1.0°	±1.5°	±2.0°	±2.5°	±3.0°	±4.0°	±5.0°	±6.0°	±7.0°	±8.0°	±10.0°	±12.0°	±15.0°	±20.0°	±25.0°	±30.0°

표준  
DRVN BY: J.H.HAN  
DSND BY: K.B.HAN  
CHKD BY: K.B.HAN  
APPD BY: K.B.HAN

SCALE  
3RD ANGLE  
3 각 법

REF. NO  
참고도면

DWG. NO  
도면번호

TITLE  
제목

DT-200V

1/1