
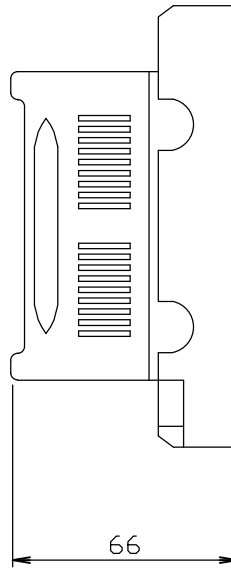


THIS DRAWING IS PROPRIETARY TO DSS
 NO PART OF THIS DRAWING MAY BE REPRODUCED
 WITHOUT THE PERMISSION OF DSS
 허가없이 복사할 수 없음

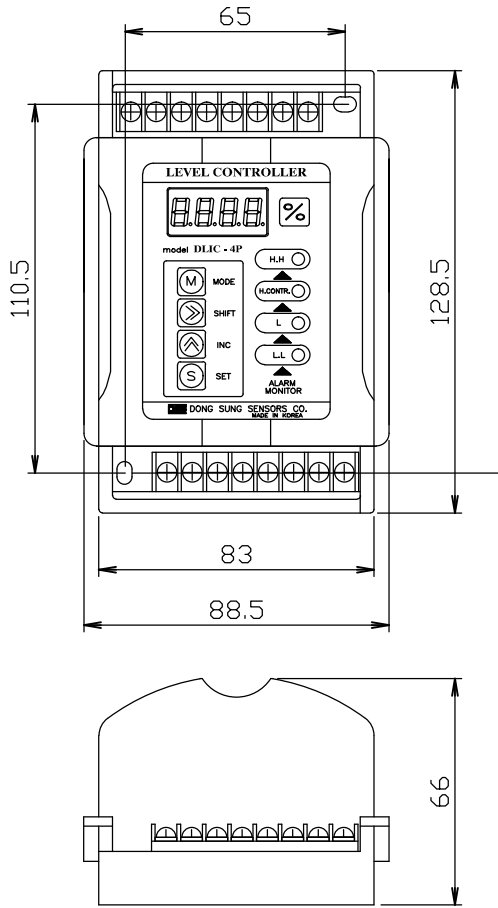

DEC-5U~DLIA-H/L

SPECIFICATION

MODEL NAME	DLIC-4P
POWER SUPPLY	AC110/220V, 50/60HZ
OUTPUT VOLTAGE	DC24V
MOUNTING METHOD	PANEL
DIMENSION (mm)	88.5(W)x66(H)x128.5(D)
AMBIENT TEMPERATURE	-20 ~ +60°C
INPUT SIGNAL	DC4~20mA
CONTACT RATING	AC250V, 5A
REMARKS:	

배 부 처	APPD BY						TOLERANCES—UNLESS OTHERWISE SPECIFIED					
	REVISION						WORK SIZE OVER	TURN PUNCH'G DIST.OF HOLE STR.	MLDG. DIE CSTG. PRCN.CSTG DRAW.	SH.MET WELD GAS CTG.	CSTG. FORG.	
	DATE						TO INCL.					
	NO	A										
	DONG SUNG SENSORS CO. TEL 02)2025-8988,9 FAX 02)2025-8987					UNIT 단위	MM. #N#	APPAR.				
						SCALE 척도	N/S	TITLE 제목	DLIC-4P			
	표준	DRWN BY 제도	DSND BY 설계	CHKD BY 검토	APPD BY 승인	3RD ANGLE 3 각 법		DWG. NO 도면번호	1/1			
	인시	J.H.HAN		K.B.HAN		REF. NO 참고도면						
	분류											
	DATE	2017.06.27		2017.06.28								