


THIS DRAWING IS PROPRIETARY TO DSS
NO PART OF THIS DRAWING MAY BE REPRODUCED
WITHOUT THE PERMISSION OF DSS
허가없이 복사할 수 없음

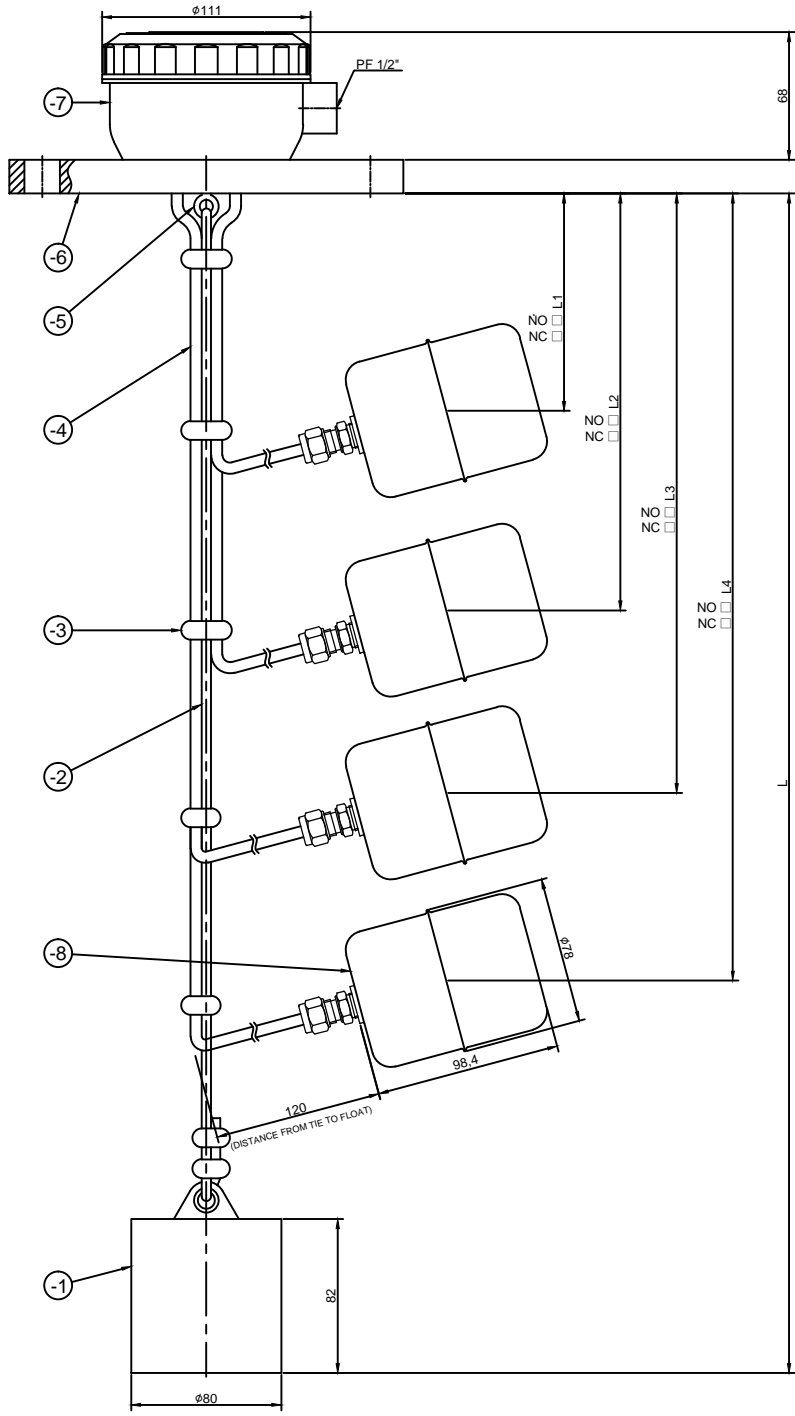

(UNIT:mm)

	L	L1	L2	L3	L4
-8	DQ-3		4	SUS304	
-7	HEAD		1	A.B.S	
-6	FLANGE		1	SUS304	
-5	EYE BOLT		1	SUS304	
-4	CABLE		4	SILICONE	
-3	SUS WIRES		7	SUS304	
-2	SUS WIRE		1	SUS304	
-1	WEIGHT		1	SUS304	
1	DQ-34F		1SET	-	
ITEM NO	PART NAME		QTY	MATERIAL	
SPECIFICATION					
MODEL NAME		DQ-34F			
PRESSURE		A.T.M			
TEMPERATURE		MAX.170°C			
APPLICATIONS		WATER, SLUDGY LIQUID, FACTORY DRAINAGE			
SWITCHING CURRENT		AC110V, 1A			
MOUNTING METHOD		TOP			
MOUNTING SIZE		ORDER MADE			
REMARKS :					
ORDER MADE(L, L1, L2, L3, L4)					

배부처							
-----	--	--	--	--	--	--	--

NO	DATE	REVISION	BY	APPD
1	2014.01.27	INITIAL RELEASE	K.B. HAN	

DONG SUNG SENSORS CO.,LTD. TEL:(02)2101-0688-9 FAX:(02)2101-0687				
표준	DRWN BY	DSND BY	CHKD BY	APPD BY
영시	J.S.LIM	K.B.HAN		
보류				
DATE	2013.12.02.	2014.01.06.		

UNIT	MM, INCH
SCALE	N/S
3RD ANGLE	3 각 편
REF. NO	참고도면

APPAR.	-
TITLE	-
제 목	DQ-34F
DWG. NO	-
도면번호	1/1

TOLERANCES-UNLESS OTHERWISE SPECIFIED					
WORK SIZE	TURN PINCHG DIST OF HOLE STR.	MLDG. DIE CSTG. FROM CSTG. DRAW.	SH.MET WELD GAS CTG.	CSTG. FORG.	
OVER 1 TO 4	± 0.1	± 0.2	± 0.3	± 0.5	± 0.7
4 TO 16	± 0.2	± 0.3	± 0.5	± 0.7	± 0.9
16 TO 63	± 0.3	± 0.4	± 0.7	± 0.9	± 1.3
63 TO 250	± 0.4	± 0.6	± 1.2	± 1.3	± 1.8
250 TO 500	± 0.6	± 0.8	± 1.5	± 1.8	± 2.5
500 TO 1000	± 0.8	± 1.0	± 2.0	± 2.5	± 3.3
1000 TO 2000	± 1.2	± 1.5	± 2.5	± 3.3	± 5.0
ANGLE	± 25°	± 5°	± 1.0°	± 2.0°	