


DWG NO.   
 -

THIS DRAWING IS PROPRIETARY TO DSS  
NO PART OF THIS DRAWING MAY BE REPRODUCED  
WITHOUT THE PERMISSION OF DSS  
해기없이 복사할 수 없음

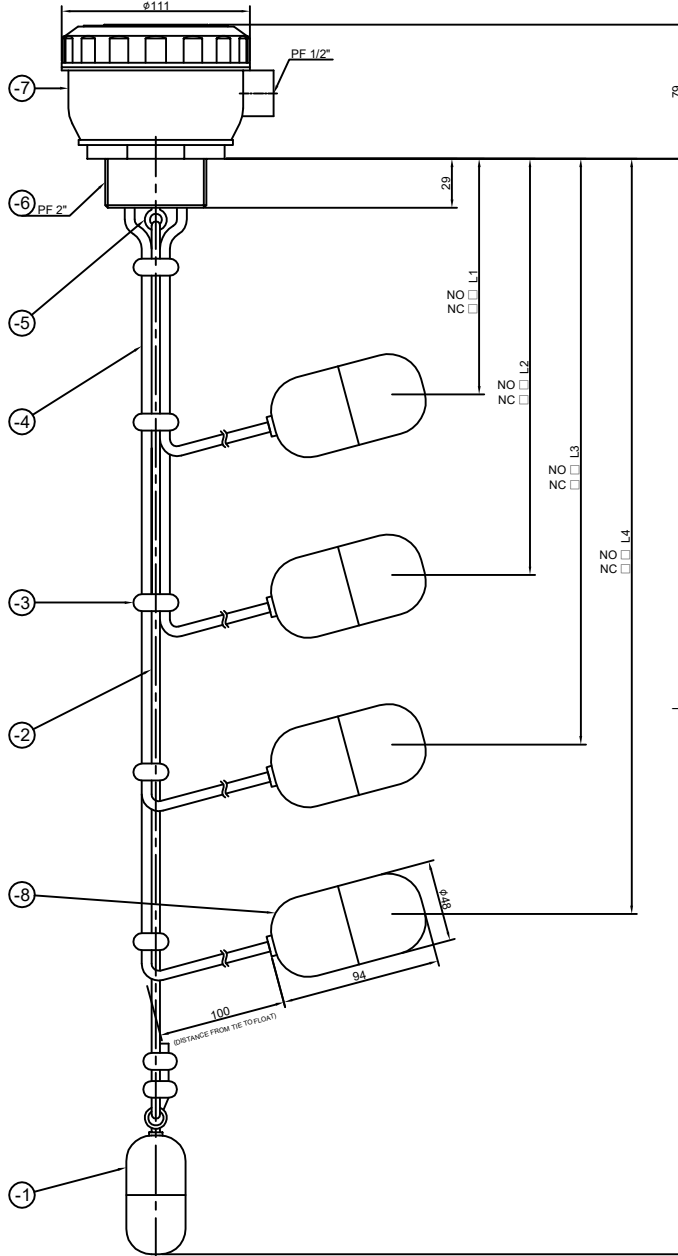

배부처

NO	DATE	REVISION	APPD BY	BY	TOLERANCES-UNLESS OTHERWISE SPECIFIED				
					WORK SIZE	TURN PUNCH DIST OF HOLE STR.	M/DG. DIE CSTG. PRON. CSTG. DRAW.	SH/MET WELD GAS CSTG.	CSTG. FORG.
1	4				± 0.1	± 0.2	± 0.3	± 0.5	
4	16				± 0.2	± 0.3	± 0.5	± 0.7	
16	63				± 0.3	± 0.4	± 0.7	± 0.9	
63	250				± 0.4	± 0.6	± 1.2	± 1.3	
250	500				± 0.6	± 0.8	± 1.5	± 1.8	
500	1000				± 0.8	± 1.0	± 2.0	± 2.5	
1000	2000				± 1.2	± 1.5	± 2.5	± 3.3	
ANGLE					± 25°	± 5°	± 1.0°	± 2.0°	

<b>DONG SUNG SENSORS CO.,LTD.</b> TEL:(02)2101-0688~9 FAX:(02)2101-0687				UNIT 단위	MM, INCH
DRWN BY J.S.LIM DATE 2013.12.02.	DSND BY K.B.HAN DATE 2014.01.06	CHKD BY APPD BY	SCALE 3RD ANGLE 3 각법	REF. NO 참고도면	APPAR. TITLE 제목 <b>DQ-24N</b> DWG. NO 도면번호 -

(UNIT:mm)				
L	L1	L2	L3	L4
-8	DQ-2	4	A.B.S	
-7	HEAD	1	A.B.S	
-6	BUSHING	1	A.B.S	
-5	EYE BOLT	1	NYLON	
-4	CABLE	4	NEOPRENE	
-3	CABLE TIE	7	A.B.S	
-2	P.P WIRE	1	P.P	
-1	WEIGHT	1	ABS+SS41	
1	DQ-24N	1SET	-	
ITEM NO	PART NAME	Q'TY	MATERIAL	
SPECIFICATION				
MODEL NAME		DQ-24N		
PRESSURE		A.T.M		
TEMPERATURE		MAX.50°C		
APPLICATIONS		WATER, SLUDGY LIQUID, FACTORY DRAINAGE		
SWITCHING CURRENT		AC220V, 3A		
MOUNTING METHOD		TOP		
MOUNTING SIZE		PF 2"		
REMARKS :				
ORDER MADE(L, L1, L2, L3, L4)				