


THIS DRAWING IS PROPRIETARY TO DSS
 NO PART OF THIS DRAWING MAY BE REPRODUCED
 WITHOUT THE PERMISSION OF DSS
 허가없이 복사할 수 없음

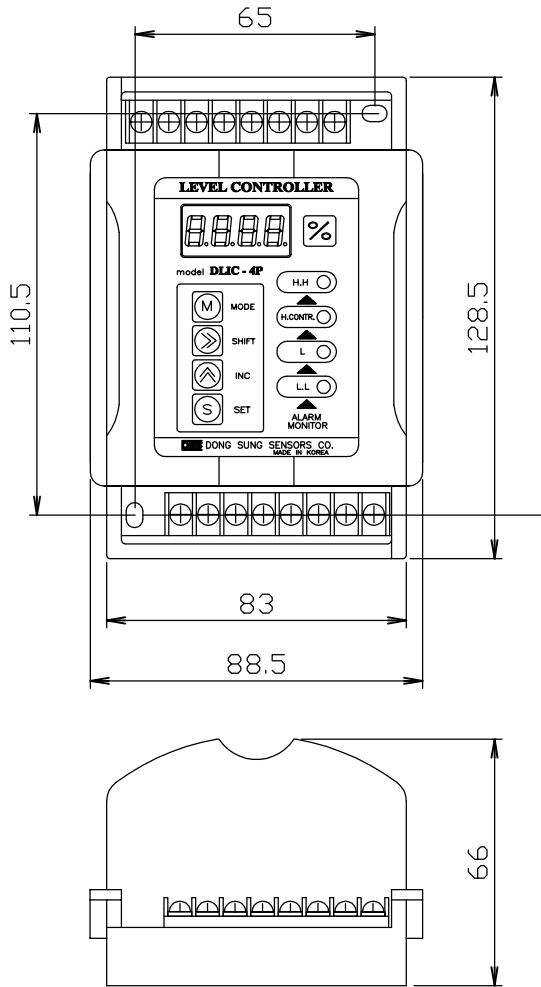

DEC-5U~DLIA-H/L

SPECIFICATION	
MODEL NAME	DLIC-4P
POWER SUPPLY	AC110/220V, 50/60HZ
OUTPUT VOLTAGE	DC24V
MOUNTING METHOD	PANEL
DIMENSION (mm)	88.5(W)x66(H)x128.5(D)
AMBIENT TEMPERATURE	-20 ~ +60°C
INPUT SIGNAL	DC4~20mA
CONTACT RATING	AC250V, 5A
REMARKS:	

NO	DATE	REVISION	APPD BY

TOLERANCES--UNLESS OTHERWISE SPECIFIED				
WORK SIZE	TURN PUNCH DIST.OF HOLE STR.	MLDG. DIE CSTG. PRCN.CSTG DRAW.	SH.MET WELD GAS CTG.	CSTG. FORG.
OVER	TO INCL.			

DONG SUNG SENSORS CO. TEL 02)2101-0688~9 FAX 02)2101-0687				UNIT 단위	MM. #CH#	APPAR.
DRWN BY 제 도				SCALE 척도	N / S	TITLE 제목
DSND BY 설 계				3RD ANGLE 3 각 법		DWG. NO 도면번호
CHKD BY 검 토				REF. NO 참고도면		
APPD BY 승 인				DATE		1/1
M I 부 류				DATE		
DATE 2017.06.27				DATE 2017.06.28		

DLIC-4P