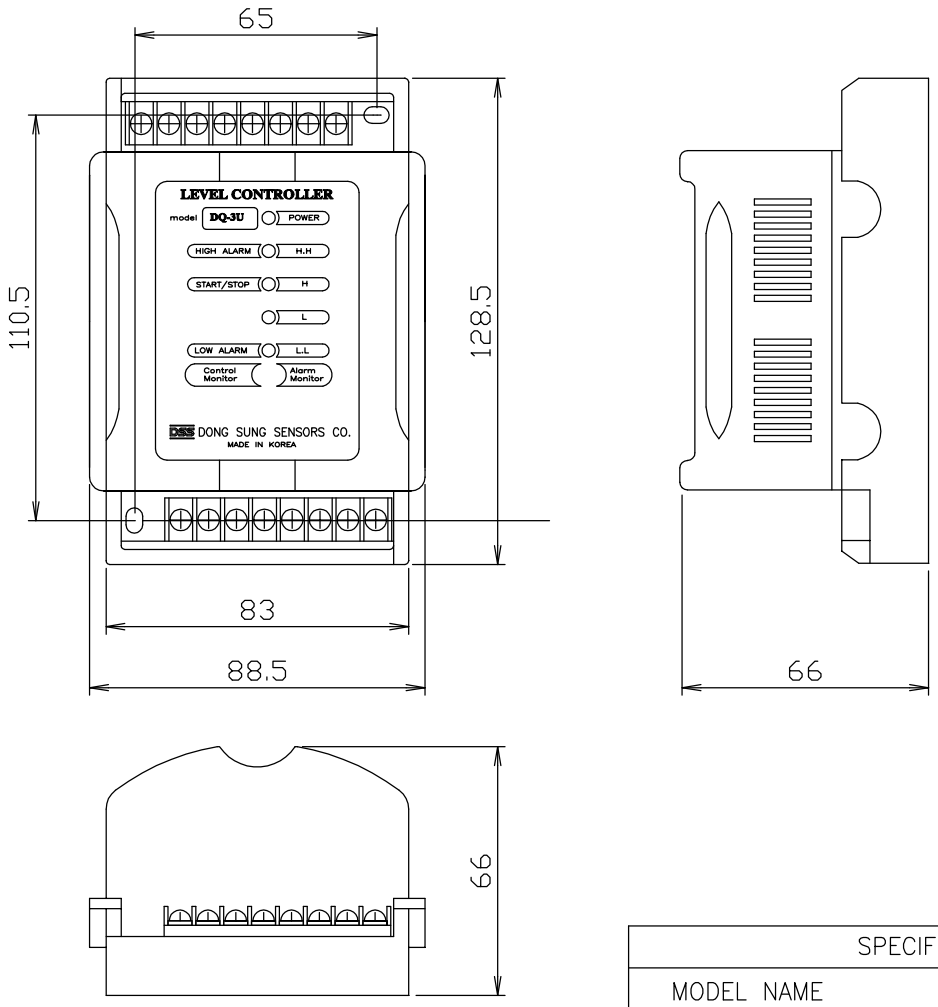

DEC-5U~DLIA-H/L

SPECIFICATION	
MODEL NAME	DQ-3U
POWER SUPPLY	AC110/220V, 50/60HZ
OUTPUT VOLTAGE	DC15V
MOUNTING METHOD	RACK
DIMENSION (mm)	88.5(W)x66(H)x128.5(D)
AMBIENT TEMPERATURE	-20 ~ +60°C
CONTACT RATING	AC250V, 5A
CONTROL OUTPUT	CONTROL, H/AL
REMARKS:	

THIS DRAWING IS PROPRIETARY TO DSS
NO PART OF THIS DRAWING MAY BE REPRODUCED
WITHOUT THE PERMISSION OF DSS
허가없이 복사할 수 없음

NO	DATE	REVISION	APPD BY
1			

TOLERANCES-UNLESS OTHERWISE SPECIFIED

SIZE OVER	SIZE TO INCL.	WORK: TURN PNCH'G DIST.OF HOLE STR.	MLDG. DIE CSTG. PRCN.CSTG DRAW.	SH.MET WELD GAS CTG.	CSTG. FORG.

배 부 처

DONG SUNG SENSORS CO.
TEL 02)2101-0688~9 FAX 02)2101-0687

표 준	DRWN BY 제 도	DSND BY 설 계	CHKD BY 검 토	APPD BY 승 인
임 시 보 류	J.H.HAN		K.B.HAN	
DATE	2017.06.27		2017.06.28	

UNIT 단위	MM. ~~INCH~~	APPAR.
SCALE 척도	N / S	TITLE 제목: DQ-3U
3RD ANGLE 3 각 법		
REF. NO 참고도면		DWG. NO 도면번호: 1/1