
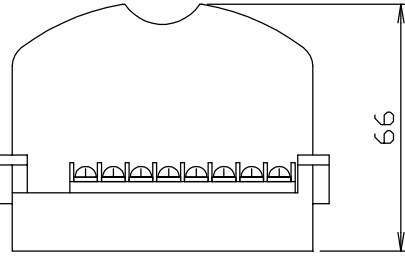
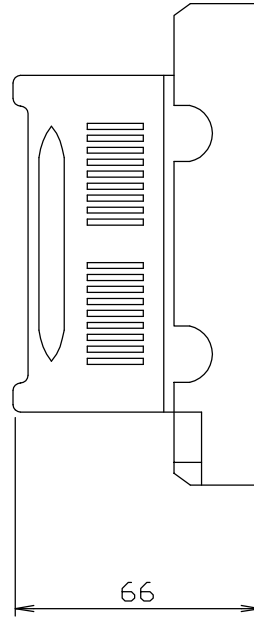


THIS DRAWING IS PROPRIETARY TO DSS
 NO PART OF THIS DRAWING MAY BE REPRODUCED
 WITHOUT THE PERMISSION OF DSS
 허가없이 복사할 수 없음

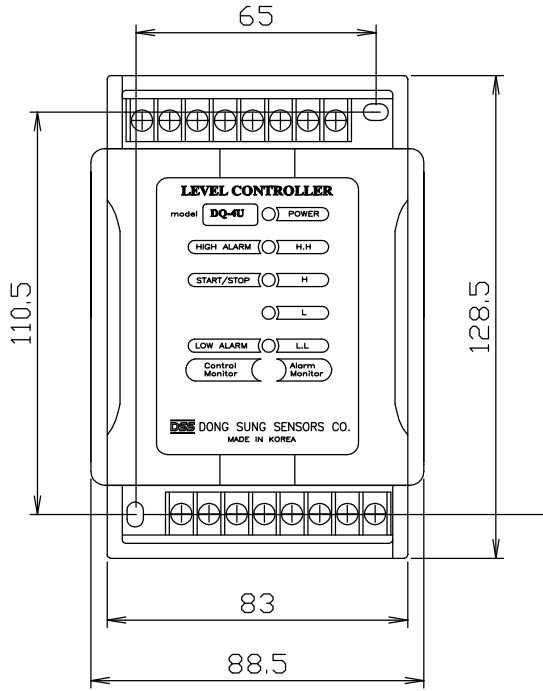

DEC-5U~DLIA-H/L

SPECIFICATION	
MODEL NAME	DQ-4U
POWER SUPPLY	AC110/220V, 50/60HZ
OUTPUT VOLTAGE	DC15V
MOUNTING METHOD	RACK
DIMENSION (mm)	88.5(W)x66(H)x128.5(D)
AMBIENT TEMPERATURE	-20 ~ +60°C
CONTACT RATING	AC250V, 5A
CONTROL OUTPUT	L/AL,CONTROL, H/AL
REMARKS:	

배부처	APPD BY	REVISION	DATE	NO	TOLERANCES-UNLESS OTHERWISE SPECIFIED					
					WORK SIZE OVER	TURN PNCH'G DIST.OF HOLE STR.	MLDG. DIE CSTG. PRCN.CSTG DRAW.	SH.MET WELD GAS CTG.	CSTG. FORG.	

DONG SUNG SENSORS CO. TEL 02)2101-0688~9 FAX 02)2101-0687	UNIT	MM. INCH	APPAR.
	SCALE	N / S	TITLE
		3RD ANGLE	DQ-4U
		3 각 법	
		REF. NO	DWG. NO
		참고도면	도면번호

표준	DRWN BY	DSND BY	CHKD BY	APPD BY
	제문	설계	검토	승인
임시	J.H.HAN		K.B.HAN	
본류				
DATE	2017.06.27	2017.06.28		